

Specifications

PS-570HD

PROTECH®

Specification

Optical Fiber Base Station PS-570

仕様

Output	
HD/SD-SDI	BNCx2: Audio,T/C embedded
Tally	D-sub 15pin x1
Time Code OUT	BNC x1
Headset	XLR 4 pin x1
Input	
Return signal	BNCx1: Composite or HD-Y
Time Code IN	BNC x1:
Genlock ※1	BNCx1: Composite or HD-Y
Tally	D-sub 15pin x1
DC	XLR 4pin(male)x1: DC 12V
Incom	
Incom	XLR 3pin x1: 2W for Clearcom XLR 5pin x1: 4W Incom, IN:-10db to +4dB,OUT:-10dB BNC x1
Remote	
Remote	8pin ※2
LANC	Stereo mini-jack Φ2.5mm
Optical fiber connection	
Cable Plug	LEMO P/N: FXW.3K.93C.TLM
maximum distance	2km with power supplied via fiber optic cable to PS470
General	
Weight	approx. 3.9kg
Dimensions (WxHxD)	215x71x320 mm
Power requirement	AC: 100/200V(85-240V) 60Hz/50Hz DC:12V(12V-16V)
Power consumption	AC operation Maximum: approx. 120W DC operation Maximum: approx. 20W
Operating temperature	+32 to 104°F (0°C to 40°C)
Storage temperature	-4 to 140°F (-20°C to 60°C)


※1 : Connector for Genlock input or Teleprompter input. (Auto detecting)

※2 : When connected to a Sony RM-B750 no picture signal is send to RM-B750.

Outside View

Optical Fiber Base Station PS-570

外觀圖

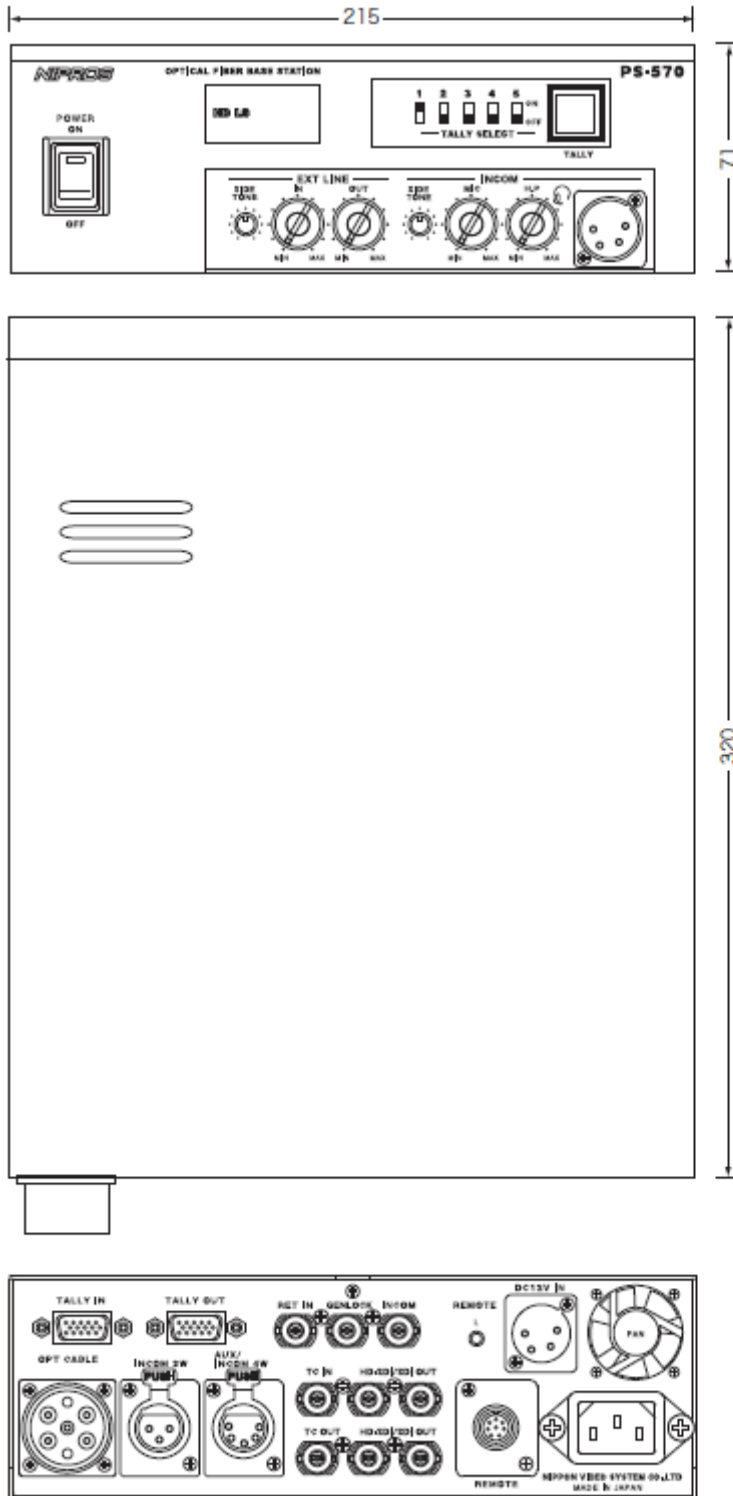

Outside dimension (unit: mm)
外形寸法図(単位:ミリ)