

PROTECH®



AC power unit

ACPROPACK100S

Accessory: AC cable

Standard type AC power unit

High-power: Total 100W output is possible.

2 sets of Canon 4-pin are equipped.

Total 100W output is possible.

Also, it is compatible with whole world compatible AC85V - AC265V power.


It removes external noise by built-in input/output filter.

It has an automatic-reset type protection circuit in case of the over-current.

It is equipped with 1 system of service electric outlet.



Outward appearance photograph

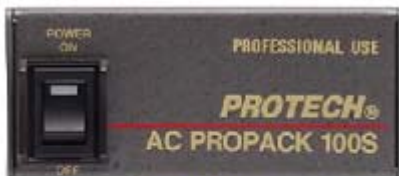

Switch panel



Connector panel

Option



DC cable

DC-C40M3

XLR 4pin (male) – XLR 4pin (female) cable. 3m



DC cable

DC-C40M5

XLR 4pin (male) – XLR 4pin (female) cable. 5m

ACPROPACK100S Specifications

| | | |
|-------------|-----------------------|--|
| Input part | Input | Power AC85V – 265V (50Hz/60Hz) |
| Output part | Output | Canon 4P x2 DC12V (15 V of measurement) Less than 100W |
| General | Dimension | 91 x 40 x 263mm (WxHxD) |
| | Weight | approx. 800g |
| | Operating temperature | 0°C – 50°C |
| | Operating humidity | 20% – 80% |