

# PROTECH®

Compact and Light-weight  
Super wide diffuser I equipped as as standard.



CamLight  
*UC-D200 series*

CamLight

20W

30W

Daylight filter

High-intensity  
halogen lamp

Robust design

Light weight  
220g

## UC-D200A

Super wide diffuser is equipped as standard.



For a camcorder equipped  
with DC light terminal for  
Cam-tap



Sony camcorder:  
DSR-250/300/300A/390/500WS/400/450WS,  
DNW-7/9WS/90/90WS, HDW-750, PDW-F330/F350, etc

## UC-D200



Standard type.

Canon 4pin connector  
is equipped on the  
rear panel.

Accessory: 20W valve  
Super wide diffuser is  
equipped as standard.



## UC-D200i



Long cable version of  
UC-D200A. Cable  
length is about 50cm.

For a camcorder with  
DC light terminal for  
Cam-tap. It can be  
attached to other  
battery holder with DC  
light terminal.

Accessory: 20W valve  
Super wide diffuser is  
equipped as standard.



Ikegami  
camcorder:  
HL-DV5/DV7/  
DV7W, etc

## UC-D200- 100PACK/L



For compact camcorders  
not equipped with DC light  
terminal. Cable length is  
about 150cm.

It can be attached with  
Sony DSR-  
PD150/170/PDX10, etc by  
attaching a battery for a  
light.

Accessory: 20W valve  
Super wide diffuser is  
equipped as standard.



Accessory shoe is necessary.

## UC-D200B



For camcorders not  
equipped with DC light  
terminal. Cable length is  
about 50cm.

It can be attached with  
cameras and camcorders  
by connecting Power  
adaptor (PBU-200P)  
between a battery and  
cameras and camcorders.


Accessory: 20W valve  
Super wide diffuser is  
equipped as standard.





Sony BVW-400A, etc  
Panasonic AJ-D400, etc

## The accurate wide illuminating-angle degree

About 55 degree tilt-up is possible to the upper part to the light axis parallel lines. Thanks to about 10 degrees down to be turned to the light axis parallel lines, it is possible to do axis adjustment in close range shooting when the deficit of the picture often occurs easily by the conventional light.

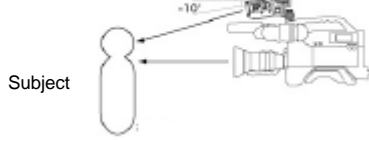


## CamLight series Option

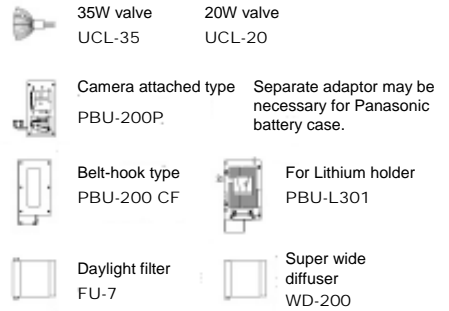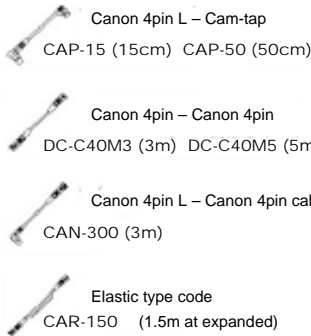

## Various filter composition and 2-type valves

Super wide diffuser is prepared in addition to the standard diffuser ( the diffuser panel ). Also, 2-type valves adjusted to the sensitivity of the camera are prepared. 35W valve is recommended for F8.0 and 20W valve is recommended for equal to or more than F10.

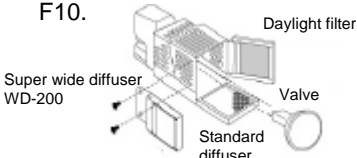

### Easy attachment and removal system

## Light-weight, robust body, only 220g

It realized the toughness to endure hard use environment and to be required in the field by using aluminum die casting parts. Also, it embodied the compact body in the about 220g lightening to reduce the added weight when installing in front of the camera. It became possible to attach video light always by the above.



## Daylight filter is equipped as standard.

The natural coloring with appropriate light-effect can be gotten by using a daylight filter in indoors in the daytime.



No Light

Light only

With Daylight filter

## Twin Handy CamLight which supports high-end shooting such as remote broadcasting, local production, news gathering




### UC-D200TWH

Accessory: 20W valve x2  
Super wide diffuser is equipped as standard.



### UC-D200TW1S

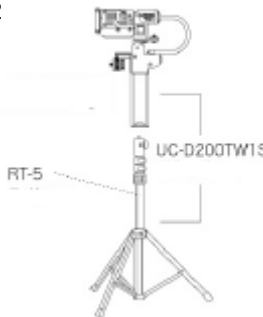

Twin Handy CamLight . It is possible to light each valve separately. Thanks to free angle function, it is possible to have various irradiation ranges. It is possible to choose a luminous energies by the change of mono light and twin light with the shooting condition.



Free adjustment of angle function

It is the system light which combined a light-stand with twin handy light. It is effective for the support of the AC light, too, in incorporating into the studio light in addition to not choosing places such as local production, news gathering, remote broadcasting, etc.

## Twin Handy CamLight Set

One light set

### UC-D200TW1S

UC-D200TWH / RT-5 Light Stand



Two lights set

### UC-D200TW2S

UC-D200TWH x2 / RT-5 Light Stand x2 / Aluminum Case



Three lights set

### UC-D200TW3S

UC-D200TWH x3 / RT-5 Light Stand x3 / Aluminum Case



Three lights set + Power supply + Cable

### UC-D200TW3F

UC-D200TWH x3 / RT-5 Light Stand x3 / Aluminum Case  
AC power ACPROPAC 100S x3 / DC-C40M3 x3 / UCL-35 x6

