

# Specifications


## FD-800S

***PROTECH***®

## 主な仕様 Main specifications

|              |  |   |
|--------------|--|---|
| Input/Output | CCU connection<br>(Canon 3pin)           | x5  |
|              | FD-300A connection<br>(Canon 3pin)       | x5  |
|              | AUX input (no power to FD-300A)<br>(BNC) | x3  |
|              | MIX input<br>(Canon 3pin)                | x2  |
|              | EXT MIC input                            | x1 (input impedance 3Kohm, Canon 3pin)              |
|              | Speaker for Intercom sound               | x1  |
| Option       | MC-808                                   | Flexible microphone to connect with FD-800          |
|              | CU-3                                     | 2wire cable to connect with Sony CCU-M3,M5          |
|              | CU-50                                    | 4wire cable to connect with Sony CCU-D50            |
|              | BND-1M                                   | Connecting cable, 1m between FD-800S<br>and FD-300A |
|              | BNC-10M                                  | Set of BND-1M and<br>canon 3pin male-female, 10m    |
|              | FD-300A                                  | Wired Intercom to connect with FD-800S              |
| Power supply | External AC input                        | 100-240V, approx. 10W                               |
|              | External DC input                        | DC12V (Canon 4pin)                                  |
| General      | Operation temperature                    | 0°C - 40°C  |
|              | Storage temperature                      | -20°C - 50°C  |
|              | Size                                     | 430x88x250mm (WxHxD)                                |
| Accessory    | AC cable, Rack mount hardware            |   |

# Outside view 外觀圖

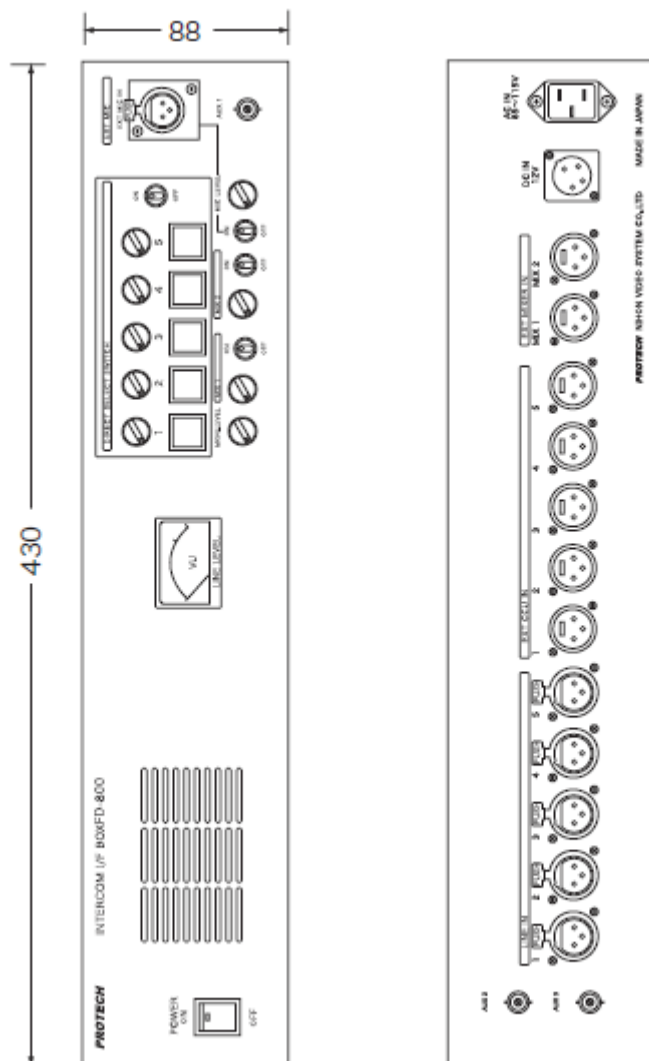

# Block Diagram

