

PROTECH[®]

Shoulder Adaptor

ST-7

**Assured Stable Shooting,
Dynamic Mobility for Camcorder !!**

ST-7 debut !!



Picture: Sony PMW-EX3 + ST-7

**It realizes stable
shooting like a shoulder
type camcorder.**





To the field forefront

It realizes shoulder operating.

It attaches a lithium-ion battery and so on directly.

It is possible to attach a Sony lithium-ion battery to the rear of the shoulder adapter ST-7 directly. It becomes possible to supply DC power to a camcorder with an optional power cable. DC out is equipped on the side panel to supply DC power to a light or a monitor.



Video signal relay terminal is equipped.

There is a camera which is equipped with the output terminal with special type connectors. ST-7 provides common type of output connectors so that they can make the cable connection / disconnection more convenient and stable.

It can be attached to Sony tripod adaptor base VCT-14/U14.

A high-quality new generation camcorder can be attached to or removed from the tripod base at one-touch operation same as a shoulder type camcorder.

It fully supports a high-quality EX camcorder.



Option



DC-EX3

Power supply cable to PMW-EX3/EX1 From ST-7



DC-CS1

Power supply cable to HVR-A1 From ST-7





DC-Z7J

Power supply cable to HVR-Z1 From ST-7



Outside dimension

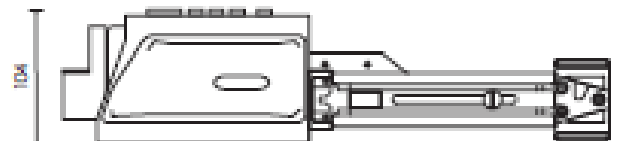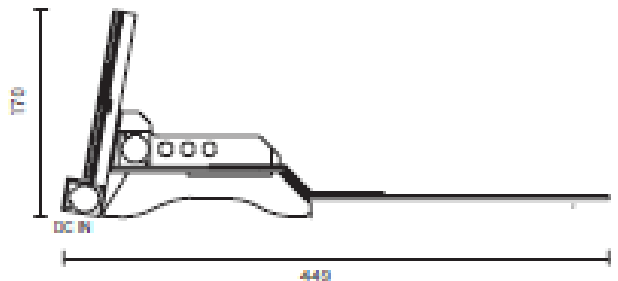

Main specifications

XLR4 DC IN (12V) x1, XLR4 DC OUT (12V) x1,

MINI4P DC OUT (12V/8.4V), lithium-ion battery input x1, Tripod screw 1/4 inch with camera screw turn prevention x1 and spare tripod screw x1,

BNC extension terminal x3, Circuit built-in which continues to send a power to the camera even if it short-circuits with Canon 4 P output. Light can be used. ,Just fit shoulder pad, Operation T: 0°C~40°C,

Storage T: -20°C~60°C, Size 104x170x449mm (WHD), Weight: approx. 1.0Kg