


HD-SDI Distributor with built-in equalizer VHD series debut !!


Distributes HD-SDI signal and equipped with built-in equalizer. Degraded signal is compensated and becomes clear signal. It is effective for 2-camera or 3-camera studio and field application. It is corresponded to the embedded audio and supports the studio shooting and editing.

*Image

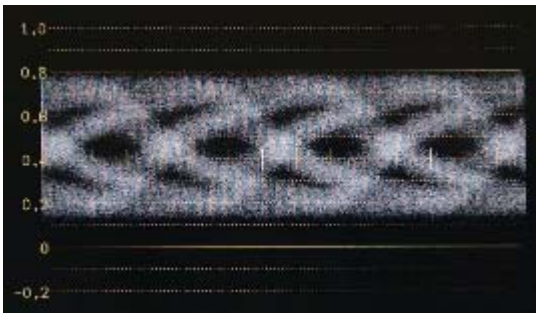

Eye Pattern

Degraded Signal

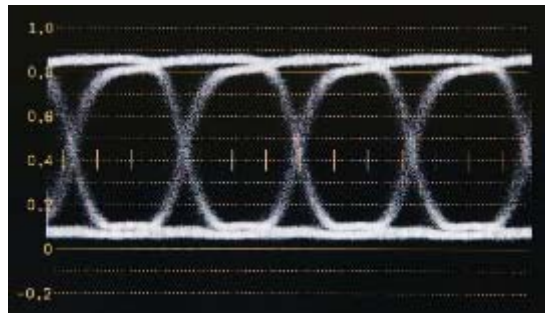

Eye Pattern

Signal compensated by
PROTECH VHD series

1 input 2 outputs



VHD-200

Accessory: AC Adaptor

1 input 4 outputs



VHD-400

Accessory: AC Adaptor

1 input 4 outputs x4 1U type



VHD-5000 EIA 1U

Accessory: (AC Adaptor, EU Countries)
Rack Mount Kit



Connector Panel

Distributes HD-SDI REC OUT of a switcher and supports the wiring to HD-SDI VTR and monitors strongly. Also, it is very effective to distribute HD-SDI signal and embedded audio in the editing room.

VHD-200 Specifications

Input	BNC x1
Output	BNC x2
Size	Approx. 85(W) x 36(H) x 57(D)mm
Weight	Approx. 400g
Power	DC12V
Power Consumption	About 4W

VHD-400 Specifications

Input	BNC x1
Output	BNC x4
Size	Approx. 85(W) x 36(H) x 87(D)mm
Weight	Approx. 600g
Power	DC12V
Power Consumption	About 4W

VHD-5000 Specifications

Input	BNC x1 x4
Output	BNC x4 x4 channels
Size	Approx. 430(W) x 44(H) x 220(D)mm
Weight	Approx. 3.2kg
Power	AC100 – 240V / DC12V *EU Countries: DC IN only
Power Consumption	About 15W at DC12V IN