

Specifications

PS-470HD

PROTECH®

Specification

Optical Fiber Camera Adaptor PS-470

仕様

Output	
Time Code	BNC x1
Return	BNC x1: 1Vp-p, 75Ω, Analog composite or HD-Y ※1
Genlock (Prompter)	BNC x1: 1Vp-p, 75Ω, self-detecting, dual purpose Genlock/Teleprompter output, composite or HD-Y (down grade compared to standard HD signal)
DC out Total 75W ※2	V-mount Adaptor x1 : DC 15V 3.5A (Maximum 15V, 3.5A) XLR 4pin(female) x1 : DC 15V 3.5A (Maximum 15V, 3.5A)
Monitor	Mini 6pin(female) x1: 13.5V 150mA (Maximum 13.7V), for LVM-43 Monitor
Input	
DC In	V-mount Holder x1 : 15V ※3
HD/SD- SDI	HD-SDI :1.485Gbps,1.485/1.001Gbps(reclock) SD-SDI :143Mbps,177Mbps, 270Mbps,460Mbps, 540Mbps(reclock)
Incom	
Incom	XLR 4pin(male) x2
Tally	
Tally lamp x3	Front x1 and Back (ON/OFF Selectable)x1
Remote	
Remote	8pin ※3
LANC	Stereo mini-jack Φ2.5mm
Optical fiber connection	
Socket	LEMO P/N: EDW.3K93C.TLC
Maximum distance	2km with power supplied from PS570
General	
Weight	approx. 1.8kg
Dimensions	180x169x91 mm (WxHxD)
Power requirement	DC 15V 20W MAX (when supplied via DC IN)
Power consumption	DC operation Maximum: approx. 20W
Operating temperature	+32 to 104°F (0°C to 40°C)
Storage temperature	-4 to 140°F (-20°C to 60°C)

※1 : VF-43W can receive an analog composite only.


※2 : DC output are available only when the power is supplied from PS-570 via an optical fiber cable.

※3 : 8pin for Sony RM-B750 or RM-B150

Outside View

Optical Fiber Camera Adaptor PS-470

外観図

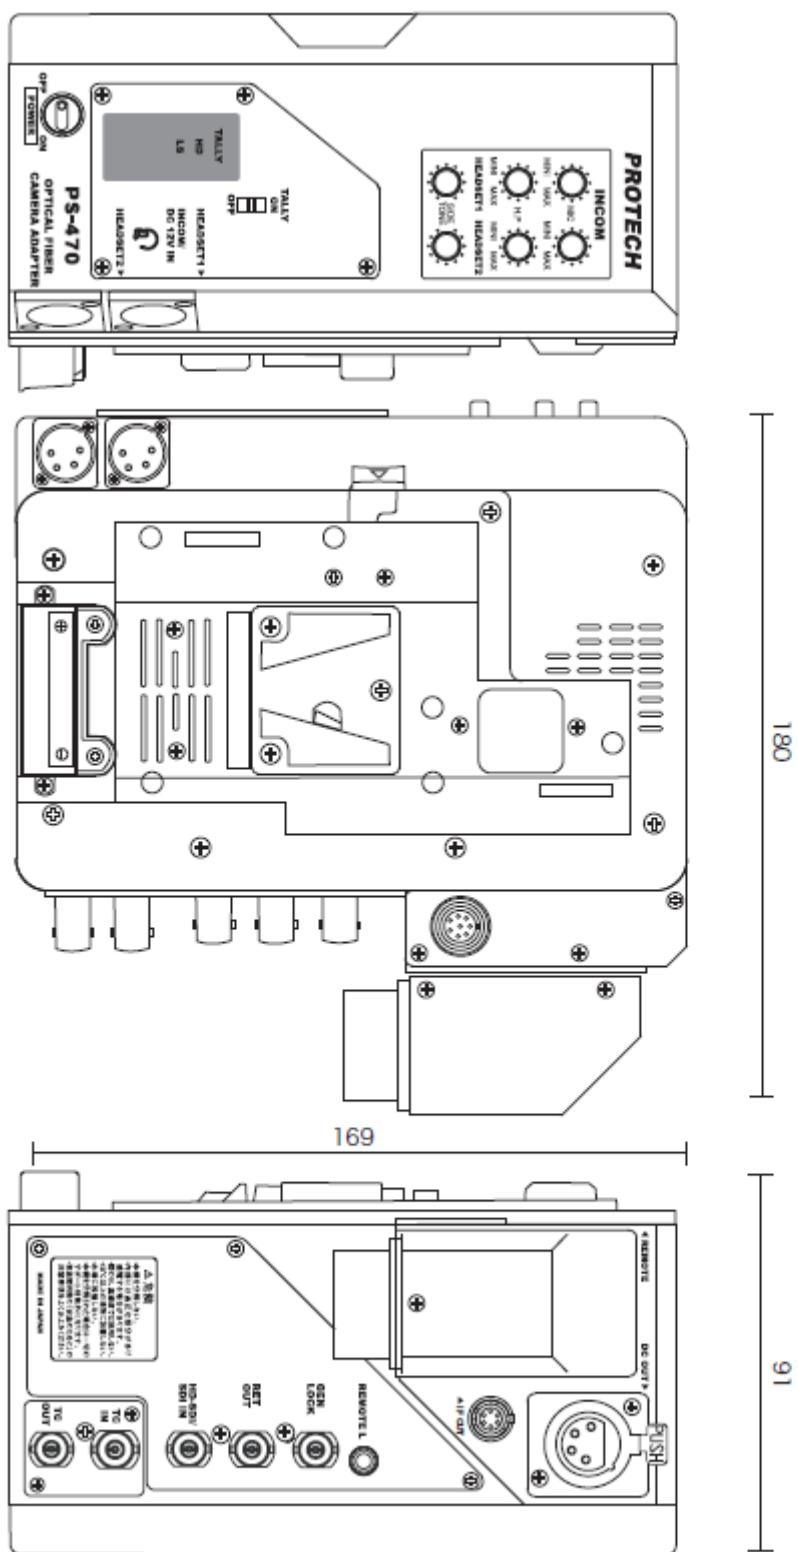

Outside dimension (unit: mm)
外形寸法図(単位:ミリ)